
Overview

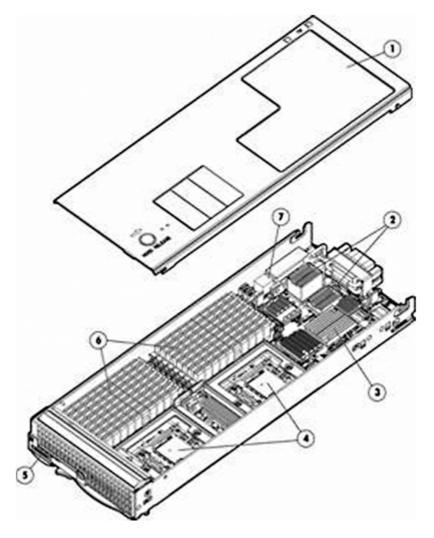

HP ProLiant BL495c Generation 6 (G6) Server Blade

- 1. Access panel
- 2. Two (2) mezzanine I/O expansion slots
- 3. Embedded dual port Flex-10 10GbE multifunction server adapter
- 4. Up to two (2) AMD Opteron™ 2400 Series processors
- 5. Local I/O connector
- 6. Sixteen (16) PC2-5300 Registered DIMM (DDR2-667) or PC2-6400 Registered DIMM (DDR2-800) memory slots
- 7. Internal USB connector

What's New

• Support for HP NC553m 10Gb 2-port FlexFabric Adapter

At A Glance

This document covers the HP ProLiant BL495c G6 server blade only. For more information on HP BladeSystem c-Class Enclosure



HP ProLiant BL495c Generation 6 (G6) Server Blade

QuickSpecs

Overview

and HP BladeSystem c-Class Interconnect and Mezzanine Components, please see the following QuickSpecs:

- HP BladeSystem c3000 Enclosure QuickSpecs:
 - http://h18000.www1.hp.com/products/quickspecs/12790 na/12790 na.html
- HP BladeSystem c7000 Enclosure QuickSpecs:
 - http://h18000.www1.hp.com/products/quickspecs/12810 na/12810 na.html
- HP BladeSystem c-Class Interconnect and Mezzanine Components:
 - http://h18004.www1.hp.com/products/blades/components/c-class-interconnects.html http://h18004.www1.hp.com/products/blades/components/c-class-adapters.html

The HP ProLiant BL495c G6 Server Blade virtualization blade eliminates the performance bottlenecks of a virtual machine host. Engineered with more memory and I/O than any other half-height blade server, this world's first virtualization blade maximizes the number and performance of VMs that you can deploy per blade.

HP ProLiant BL495c G6 server blade includes:

• Processor:

- O Up to two (2) Six-Core AMD Opteron™ 2400 series processors
- O Supports up to 2.6 GHz, 2.2 GHz HyperTransport™; 512 KB Level 2 cache memory per core; 6 MB Level 3 cache
- O Dual-Link AMD HyperTransport connection between processors for maximum performance
- O AMD Dual Dynamic Power Management™ for optimum performance and reduced power consumption
- O ServerWorks HT-1000 and HT-2100 chipsets

Memory:

- O Up to 128 GB of memory, supported by sixteen (16) slots of PC2-5300 Registered DIMMs at 667MHz or 64GB of memory, supported by sixteen (16) slots of PC2-6400 Registered DIMMs at 800MHz
- O Supporting memory interleaving (2:1)

NOTE: The memory bus will operate at 800 MHz with four (4) or fewer DIMMs per processor, 667 MHz with six (6) DIMMs per processor, and 533 MHz with eight (8) DIMMs per processor.

Storage Controller:

O HP Embedded SATA Controller

NOTE: RAID functionality requires the use of an optional Smart Array mezzanine card. See the Storage Controller options section below.

Internal Drive Support:

- O Up to two (2) non-hot plug SATA Solid State Drives (SSD)
- O With an attached SB40c Storage Blade, up to six (6) hot plug SFF Serial Attached SCSI (SAS) or SATA Hard Drives (optional)

Network Controller:

O Embedded NC532i Dual Port Flex-10 10GbE Multifunction Server Adapter

NOTE: Flex-10 capability requires the use of an HP Virtual Connect Flex-10 10Gb Ethernet module. Learn more at: www.hp.com/go/virtualconnect.

NOTE: Each port is autosensing 1Gb/10Gb, and can interoperate with 1Gb HP BladeSystem c-Class interconnect components.

One (1) additional 10/100 server adapter dedicated to iLO 2 Management

• Mezzanine Support:

- O Two (2) I/O expansion mezzanine slots
- O Supports up to two (2) mezzanine cards
 - Dual-Port FlexFabric Adapter mezzanine option
 - Dual-Port Fibre Channel Mezzanine options for SAN connectivity
 - iSCSI Ethernet mezzanine option for optimized iSCSI connectivity
 - Ethernet server adapter mezzanine options for additional network ports
 - 4X DDR InfiniBand (IB) Mezzanine (20 Gb/s) options for low latency server interconnectivity (based on Mellanox technology)



Overview

- I/O Accelerator mezzanine options for high transaction rate local storage
 SAS mezzanine option for external direct attach and shared SAS storage
- Internal USB Support:
 - O One (1) internal USB 2.0 connector for security key devices and USB drive keys
- Form Factor:
 - O HP ProLiant BL495c G6 server blade plugs into the BladeSystem c3000 and c7000 enclosures
- Infrastructure Management:
 - O This server blade requires the latest version of the Onboard Administrator firmware. This firmware release may also require other subsystem firmware upgrades. For information on the latest firmware versions, please see the Blades Firmware Maintenance website at: http://h18004.www1.hp.com/products/blades/components/c-class-compmatrix.html
 - O HP Integrated Lights-Out 2 management processor for simplified server setup, health monitoring and recovery, power and thermal control, and lights-out remote administration.
 - O HP Insight Control, a product option, delivers essential infrastructure management that can help save time and money by making it easy to deploy, migrate, monitor, control and optimize your IT infrastructure through a single, simple management console. Insight Control supports both Windows and Linux-based central management servers.
 - O HP Insight Dynamics for ProLiant, a product option, is an integrated command center that enables IT Staff personnel to continuously analyze and optimize a converged infrastructure, while automating and reducing the cost of common data center tasks by as much as 40 percent. This ultimately enables them to dynamically keep pace with the organization's changing business requirements.
- Operating Systems and Virtualization Software:
 - O Supports Windows, RHEL, SLES, VMware ESX, Citrix XenServer
- Enclosures:
 - O HP offers three different c-Class server blade enclosures to meet your individual needs:
 - The HP BladeSystem c7000 rack enclosure is 10U high and holds up to sixteen (16) ProLiant BL495c G6 servers plugged vertically.
 - The HP BladeSystem c3000 rack enclosure is 6U high and holds up to eight (8) HP ProLiant BL495c G6 servers plugged horizontally.
 - O Server blades, storage blades, and interconnect modules are all designed to fit into the c7000 and c3000 enclosures.
 - O For additional enclosure information, please see: http://h18004.www1.hp.com/products/blades/components/enclosures/c-class/index.html.

Warranty:

O This product is covered by a global limited warranty and supported by HP Services and a worldwide network of HP Authorized Channel Partners. Hardware diagnostic support and repair is available for three years from date of purchase. Support for software and initial setup is available for 90 days from date of purchase. Enhancements to warranty services are available through HP Care Pack services or customized service agreements. Hard Drives have either a one year or three year warranty; refer to the specific hard drive QuickSpecs for details.

NOTE: Server warranty includes 3-year Parts, 3- year Labor, 3-year on-site support. Warranty repairs may be accomplished through the use of Customer Self Repair (CSR) parts. These parts fall into two categories: 1) Mandatory CSR parts are designed for easy replacement. A travel and labor charge will result when customers decline to replace a Mandatory CSR part; 2) Optional CSR parts are also designed for easy replacement but may involve added complexity. Customers may choose to have HP replace Optional CSR parts at no charge. Additional information regarding worldwide limited warranty and technical support is available at:

http://h18004.www1.hp.com/products/servers/platforms/warranty/index.html



Standard Features

NOTE: For the Standard Features shipped in the "Factory Integrated Models", please see the "Configuration Information - Factory Integrated Models" section.

Processor Six-Core Processors

AMD Opteron[™] processor Model 2435 (2.6 GHz, 6 MB L3 Cache, 75W ACP) AMD Opteron processor Model 2427 (2.2 GHz, 6 MB L3 Cache, 75W ACP)

Low Power AMD Opteron processor Model 2425 HE (2.1 GHz, 6 MB L3 Cache, 55W ACP)

NOTE: Offered through Configure-To-Order process only. See Factory Integration Models section for

more details.

NOTE: AMD Opteron 2400 series processors are 64-bit, six-core, and support AMD Virtualization™. NOTE: Processor wattage references reflect Average CPU Power (ACP). For more information on ACP

visit: http://www.amd.com/powernow.

Upgradeability Upgradeable to dual (2) processors

Cache Memory 512 KB Level 2 cache memory per core

6 MB Level 3 cache memory

Chipset ServerWorks HT-1000 and HT-2100

Memory Type PC2-5300 DDR2 Registered DIMMs at 667 MHz

PC2-6400 DDR2 Registered DIMMs at 800MHz

Standard 4 GB (2 x 2 GB)

Maximum 128 GB (16 x 8 GB) at 533 MHz

NOTE: Memory must be installed in pairs.

NOTE: The memory bus will operate at 800 MHz with four (4) or fewer DIMMs per processor, 667 MHz

with six (6) DIMMs per processor, and 533 MHz with eight (8) DIMMs per processor.

Network Controller Embedded NC532i Dual Port Flex-10 10GbE Multifunction Server Adapter

NOTE: Flex-10 capability requires the use of an HP Virtual Connect Flex-10 10Gb Ethernet module.

Learn more at www.hp.com/go/virtualconnect.

NOTE: The iSCSI offload feature of the embedded multifunction adapter requires the HP Accelerated

iSCSI Pack. For more information, please see the QuickSpecs at:

http://h18000.www1.hp.com/products/quickspecs/12466_na/12466_na.html

One (1) additional 10/100 server adapter dedicated to iLO 2 management

I/O Expansion Slots Two (2) I/O expansion mezzanine slots (One x8 and one x4 PCI Express)

Integrated Manageability HP Integrated Lights-Out 2 (iLO 2) management processor



Standard Features

Storage Controller

HP Embedded SATA Controller (for connecting to non-hot plug SATA SDD only)

NOTE: RAID functionality requires the use of an optional Smart Array mezzanine card. See the Storage

Controller options section below.

Maximum Internal Storage Non-Hot Plug SATA (SATA) SSD

Blade attached)

128GB

2 x 64GB SATA SSD

Hot Plug SFF SAS (with optional SB40c Storage

1.8TB

6 x 300GB Hot Plug SAS

Graphics

Integrated ATI RN-50 1280 x 1024 x 16M color (32 MB DDR1 memory)

Graphics Resolution Supported Resolution Color Depths

1280 x 1024, 16.7M, 64k, 256, 16 1024 x 768, 16.7M, 64k, 256, 16 800 x 600, 16,7M, 64k, 256, 16 640 x 480, 16,7M, 64k, 256, 16

Fibre Channel Support

Two (2) optional dual-port Fibre Channel HBAs are supported by the HP ProLiant BL495c G6. Each mezzanine circuit board connects directly to the server blade system board. These Fibre Channel HBAs are available via option kits and must be ordered separately.

HBA mezzanine card option kits:

Emulex LPe1105 4Gb Fibre Channel Host Bus Adapter for c-Class BladeSystem (PN 403621-B21)

 Based on the same field-proven ASIC, firmware, and driver technology as Emulex's renowned LPe1150 HBA, the Emulex LPe1105-HP is fully driver compatible with all Emulex HBAs

QLogic QMH2462 4Gb Fibre Channel Host Bus Adapter for c-Class BladeSystem (PN 403619-B21)

 Uses common drivers which means that customers can standardize on one QLogic driver whether they are using the QMH2462 or other HBAs powered by QLogic

Emulex and QLogic Fibre Channel HBAs for HP BladeSystem c-Class feature:

- Optimal performance utilizing PCI Express
- 4/2/1Gb/s auto negotiating speeds (4Gb HBAs)
- Dual-ports for redundant path connections
- Up to two FC HBAs per server blade providing redundant FC HBA support
- Optimized for HP StorageWorks and supported by third party SAN vendors
- Support for Microsoft® Windows® and Linux operating system environments



Standard Features

Compatible SAN

HP ProLiant BL495c G6 server blades are optimized for HP StorageWorks MSA, EVA, and XP HP ProLiant BL495c G6 server blades are compatible with select 3rd party SANs (please see blade storage page for more details:

http://h18004.www1.hp.com/products/blades/components/c-class-sans.html)

HP Virtual Connect

HP Virtual Connect simplifies server connectivity to LANs and SANs, and reduces costs. Unique HP Flex-10 technology makes maximum use of 10Gb Ethernet bandwidth by allowing multiple ports within a single Industry Standard connection that can be dynamically tuned to meet individual server requirements. HP Virtual Connect Enterprise Manager (VCEM) provides a central console to administer connections and workloads for thousands of servers. For more information on Virtual Connect Ethernet, Fibre Channel and management options see: www.hp.com/go/virtualconnect

HP Insight management software

HP Insight Foundation

Managing the growing number of servers can be complex and expensive for your organization. IT managers need to address changing business needs with tools that meet the challenges of managing today's complex Datacenters.

HP provides management solutions that are designed to simplify a server's installation, configuration and maintenance throughout the entire server lifecycle. This provides the customer with higher levels of operational efficiency and highly reliable systems: www.hp.com/go/foundation.

The foundation pack includes:

- HP SmartStart
- HP Management DVD
- HP ProLiant Smart Update Firmware DVD
- SmartStart version supported (minimum): SmartStart 8.1 http://www.hp.com/servers/smartstart

NOTE: In an effort to support reducing our environmental impact, the HP Insight Foundation Suite for ProLiant media will be available as a selectable option for this server at time of order of a Factory Integrated Model. This will allow customers to order the number of media kits that best meet their needs and eliminate receiving unnecessary duplicate media.

HP Integrated Lights-Out (iLO)

HP Integrated Lights-Out (iLO) simplifies server setup, health monitoring, power and thermal control, and lights-out remote administration of ProLiant ML, DL, and BL servers. HP iLO functions without additional software and can be accessed from any location via a web browser. HP iLO works hand-in-hand with HP Systems Insight Manager, Insight Control suites, and Insight Dynamics for ProLiant, helping customers unleash the value of the ProLiant platform and deliver the highest possible quality of IT service. For more information, visit: www.hp.com/go/iLO

HP Insight Control

HP Insight Control, a product option, delivers essential infrastructure management that can help save time and money by making it easy to deploy, migrate, monitor, remote control, and optimize your IT infrastructure through a single, simple management console.

Two versions of Insight Control are available, to serve environments requiring



Standard Features

either a Linux-based or a Windows-based central management server: HP Insight Control for Linux, and HP Insight Control. See www.hp.com/go/insightcontrol

HP Insight Control includes one year of 24 x 7 HP Software Technical Support and Update Service ensuring rapid access to HP support staff and proactive delivery of software updates. For more information about this service, please visit: http://www.hp.com/services/insight.

HP Insight Dynamics for ProLiant

HP Insight Dynamics for ProLiant, a product option, is an integrated command center that enables IT Staff personnel to continuously analyze and optimize a converged infrastructure, while automating and reducing the cost of common data center tasks by as much as 40 percent. As a powerfully integrated by design toolkit to accelerate complex technology projects and simplify daily operations that ultimately enable IT Staff personnel to dynamically keep pace with the organizations changing business requirements. It enables them to plan capacity and power continuously, balance across physical and virtual resources, and ensure cost-effective high availability. It also enables IT organizations to provision infrastructure consistently and automatically from pools of shared resources using a selfservice portal. Resources provisioned can range from a single virtual machine to complex multi-tier environments and their associated physical and virtual resource requirements. In addition to the previous functional benefits, it also provides a cost-effective disaster recovery for physical and virtual environments that works with HP StorageWorks Continuous Access software for both the Enterprise Virtual Array and the XP storage array allowing application environments to be reactivated in minutes with the touch of a button to a remote location.

NOTE: For more information, visit: http://www.hp.com/go/insightdynamics

High Performance Clusters

HP Cluster Platforms

HP Cluster Platforms are specifically engineered, factory-integrated large-scale ProLiant clusters optimized for High Performance Computing, with a choice of servers, networks and software. Operating system options include specially priced offerings for Red Hat Enterprise Linux and Novell SLES, as well as Microsoft Windows HPC Server. A Cluster Platform Configurator simplifies ordering. http://www.hp.com/go/clusters

HP HPC Interconnects

High Performance Computing (HPC) interconnect technologies are available for this server as part of the HP Cluster Platform portfolio. These high-speed InfiniBand and Gigabit interconnects are fully supported by HP when integrated within an HP cluster. Flexible, validated solutions can be defined with the help of configuration tools.

http://www.hp.com/techservers/clusters/ucp/index.html

HP Cluster Management Utility

HP Cluster Management Utility (CMU) is an HP-licensed and HP-supported suite of tools that are used to manage large-scale Linux ProLiant systems. CMU includes software for the centralized provisioning, management and monitoring of nodes. CMU makes the administration of clusters user friendly, efficient, and effective. http://www.hp.com/go/cmu



Standard Features

HP HPC Linux Value Pack HP HPC Linux Value Pack (Value Pack) is an HP-licensed and HP-supported specially priced software bundle for the development and deployment of applications on HPC Cluster Platforms. Value Pack includes the Platform LSF workload scheduler, the HP-MPI parallelization library, the HP Unified Parallel C compiler and the HP Shmem library, as well as the execution environments for the libraries and compiler. HP HPC Linux Value Pack

Operating Systems and Virtualization Software

Microsoft Windows Server

Microsoft Windows Server Hyper-V Red Hat Enterprise Linux (RHEL) SUSE Linux Enterprise Server (SLES)

VMware ESX Citrix XenServer

NOTE: For more information on HP's Certified and Supported ProLiant Servers for OS and Virtualization Software and latest listing of software drivers available for your server including, how to purchase from HP, please visit our OS Support Site at: http://www.hp.com/go/supportos and our driver download page http://www.hp.com/support/BL495cG6

Availability

Dual-Port Fibre Channel Mezzanine Card for redundant SAN connection

Dual- and Quad-Port server adapter for redundant LAN connections

Redundant ROM on each server blade Multiple mezzanine I/O expansion

ECC Memory

Network adapter teaming (network fault tolerance, transmit load balancing, switch-assisted load

balancing)

Industry Standard Compliance

ACPI 2.0 Compliant PCI 2.2 Compliant

Microsoft® Logo certifications

USB 2.0 Support

Security

Power-on password Administrator's password

Integrated Lights-Out 2 has 12 customizable user accounts and SSL encryption

Integrated Lights-Out 2 can be disabled via a Global Setting

Standard Features

Factory Express Portfolio for Servers and Storage

HP Factory Express offers configuration, customization, integration and deployment services for HP servers and storage products. Customers can choose how their factory solutions are built, tested, integrated, shipped and deployed.

Factory Express offers service packages for simple configuration, racking, installation, complex configuration and design services as well as individual factory services, such as image loading, asset tagging, and custom packaging. HP products supported through Factory Express include a wide array of servers and storage: HP Integrity, HP ProLiant, HP ProLiant Server Blades, HP BladeSystem, HP 9000 servers as well as the MSAxxxx, VA7xxx, EVA, XP, rackable tape libraries and configurable network switches.

For more information on Factory Express services on your specific server model please contact your sales representative or go to: http://www.hp.com/go/factory-express.

HP Enterprise Configurator

The HP eConfigure Enterprise Configurator now provides factory default racking for our HP hardware portfolio. This approach is aligned with our strategic direction to meet the needs and expectations of our valued customers. If you require "custom" rack configuration, please contact HP's Customer Business Center or an Authorized Partner for assistance. http://www.hp.com/products/configurator.



Service and Support

Service and Support

HP Care Pack Services: Packaged server and storage services for increased uptime, productivity and ROI

When you buy HP server and storage products and solutions, it's also a good time to think about what levels of support you may need. Our portfolio of service options reduce deployment and management worries while helping you get the most out of your server and storage investments. We take a holistic approach to your environment, bridging servers, blades, storage, software and network infrastructures with our packaged HP Care Pack Services for servers and storage.

Protect your business beyond warranty

When it comes to robustness and reliability, standard computing equipment warranties have matured along with technology. Good news that can also create problems stemming from depending on standard warranties designed to only protect against product defects and some downtime causes. Using a standard approach to warranty uplifts, such as HP Care Pack Services, helps reduce downtime risks and provides operational consistency for mission-critical and standard business computing.

HP Care Pack Services: Upgrading or extending standard server and storage warranties cost effectively

HP Care Pack Services offer a standard reactive hardware and software support services suite sold separately, or combined with our Support Plus and Support Plus 24 services. The portfolio also provides a combination of integrated proactive and reactive services, such as Proactive 24 Service and Critical Service. In addition with HP Proactive Select, you can acquire the specific proactive constancy and technical services. HP Proactive Select menu offers a broad set of service options that you can mix and match depending on your specific requirements. Proactive service options include offers for server, storage, network, SAN device, software, environment and education services.

HP server and storage lifecycle support services offers a full spectrum of customer care-from technology support to complex migrations to complete managed services. HP Factory Express provides customization, integration and deployment services for turnkey solutions. HP Education Services offer flexible, comprehensive training on to help your IT staff get the most out of your server and storage investments. HP Financial solutions extend innovative financing and cost-effective asset management programs-from purchase to equipment retirement.

Learn more: www.hp.com/services/servers and www.hp.com/services/storage

NOTE: Care Pack Services availability may vary by product and country.

HP Care Pack Services are sold by HP and HP Authorized Service Partners:

- Services for customers purchasing from HP or an enterprise reseller are quoted using HP order configuration tools.
- Customers purchasing from a commercial reseller can find HP Care Pack Services at http://www.hp.com/go/lookuptool



Service and Support

Recommended HP Care Pack Services for optimal satisfaction with your HP product

Recommended Services

3-Year HP Hardware Support Onsite Call-to-Repair (CTR) Service, 6- or 24-hour

Provides your IT manager with a team of support specialists who will quickly begin troubleshooting the system to help return the hardware to operating condition within 6 or 24 hours of the initial service request to the HP Global Solution Center.

HP is committed to repairing your hardware within a maximum of six or twenty four hours. The benefits include:

- Improved system uptime
- Predictable repair times
- More effective IT resource planning
- Consistent level of hardware support across your multi-technology systems

http://h20195.www2.hp.com/V2/GetPDF.aspx/5981-6636ENN

3-Year HP Hardware Support Onsite Service, 4-hour response, 24x7

Provides you with rapid remote support and if required an HP authorized representative who will arrive on site any time and day of the year to begin hardware maintenance service within 4 hours of the service request being logged.

This service provides a trained HP service specialist to perform an installation that meets HP quality standards, for:

- Help improve or maintain system uptime
- Convenient onsite support
- Committed response time

http://h20195.www2.hp.com/V2/GetPDF.aspx/5982-6547EEE

HP ProLiant Server Hardware Installation

Provides for the basic hardware installation of HP branded servers, storage devices and networking options to assist you in bringing your new hardware into operation in a timely and professional manner.

- Expedited installation, with all service prerequisites met before the installation is performed
- Installation in accordance with manufacturer's specifications, enhancing the supportability of your HP-installed hardware and software
- Service delivery at a mutually scheduled time
- Allows your IT resources to stay focused on their core tasks and priorities
- Availability of an HP service specialist to answer questions during the onsite delivery of this service

http://h20195.www2.hp.com/V2/GetPDF.aspx/5981-9356EN



Service and Support

Optional HP Care Pack Services that will enhance your HP product experience

Optional Services

HP Enhanced Network Installation & Startup for BladeSystem Switches

Provides for the configuration and testing of BladeSystem Ethernet interconnect switches to facilitate proper implementation of network protocols and access to advanced features.

http://h20195.www2.hp.com/V2/GetPDF.aspx/4aa0-5969ENW

3-Year HP Proactive 24

As an alternative to our recommended support level, for customers who want enhanced operational effectiveness and proactive problem identification:

Provides improved stability, availability and operational effectiveness with an integrated hardware and software support service that combines industry-leading reactive technical assistance with proactive account services, giving your IT manage support from a team of service specialists.

http://h20195.www2.hp.com/V2/GetPDF.aspx/4AA0-1614ENUC

HP Proactive Select Service

Customer needs on demand access to consulting, technical proactive services and education courses

Provides a flexible way to purchase HP best-in-class consultancy and technical services. You can buy Proactive Select Service Credits when you purchase your hardware and then use the credits over the next 12 months.

http://h20195.www2.hp.com/V2/GetPDF.aspx/4AA2-3842ENN

eSupport

HP eSupport is a portfolio of technology-based services that assist you with managing your business environment - from the desktop to the data center.

Support Portal

The HP support portal provides one-stop access to the information, tools and services you need to manage the daily operations of your IT environment.

Features include:

- Access to self-solve tools (including search technical knowledge base)
- Efficient logging and tracking of support cases
- Collaboration with other business and IT professionals
- Download of patches and drivers
- Access to diagnostic tools
- Proactive notification of relevant information

Access to certain features of the support portal requires an HP service agreement. To access the support portal, visit: http://www.hp.com/support

HP Insight Remote Support software delivers secure remote support for your HP Servers and Storage, 24 X 7, so you can spend less time solving problems and more time focused on your business. You can have your systems remotely monitored for hardware failure using secure technology that's been proven at thousands of companies around the world. In many cases, you can avoid problems before they occur.



Service and Support

Customer Technical Training

In today's cost-conscious business environment, IT professionals, developers, consultants and users face an interesting challenge: how to keep up with the latest technologies and expand important skills while delivering profitable results on current projects. To help address this challenge, HP offers innovative training solutions that help keep you up-to-date on virtualization, server, storage, Insight Control, Citrix, Microsoft® and open source/Linux-related topics-while spending less time away from business-critical activities.

HP Services Awards

HP Technology Services continues to be recognized for service and support excellence by customers, partners, industry organizations and publications around the world. Recent honors and award reflect our services team's dedications, technical expertise, professionalism and uncompromising commitment to customer satisfaction.

Additional Services Information

To learn more on HP ProLiant servers, HP BladeSystem servers and HP StorageWorks storage products, please contact your HP sales representative or HP Authorized Channel Partner. Or visit: www.hp.com/services/proliant or www.hp.com/services/bladesystem or http://www.hp.com/hps/storage



Models

Six-Core Models

HP ProLiant BL495c G6 2435 6C, 4G (1P) 539804-B21

HP ProLiant BL495c G6 2427 6C, 4G (1P) 539807-B21 Processor(s)

One of the following depending on model

Cache Memory
One of the following depending on model

Memory

Network Adapter

Internal Storage

(1) AMD Opteron[™] processor Model 2435 (2.6 GHz)
(1) AMD Opteron processor Model 2427 (2.2 GHz)

512~KB Level 2 cache memory per core

6 MB Level 3 cache memory

4 GB (2 x 2 GB) PC2-6400, Registered DDR2-800

Embedded NC532i Dual Port Flex-10 10GbE Multifunction Server Adapter

and one (1) additional 10/100 server adapter dedicated to iLO 2

management

Storage Controller HP Embedded SATA Controller

Hard Drives No drives included; (2) Non-Hot Plug SSD internal drive bays

Up to 128 GB SATA SSD

Optical Drive None

Form Factor Up to eight (8) half-height blades supported in the HP BladeSystem c3000

Enclosure

Up to sixteen (16) half-height blades supported in HP BladeSystem c7000

Enclosure

Configuration Information - Factory Integrated Models

NOTE: This section lists some of the steps required to configure a Factory Integrated Model. To ensure only valid configurations are ordered, HP recommends the use of an HP approved configurator. Contact your local sales representative for information on CTO product offerings and requirements.

NOTE: HP does not allow factory integration of options into standard models listed above.

Configure-to-order servers must start with a CTO Chassis.

NOTE: FIO indicates that this option is a Factory Installable Option.

Step 1: Base Server Blade Configuration

HP Models HP ProLiant BL495c G6 Configure-to-order Server

539810-B21

Configurable Model ships with:

Embedded NC532i Dual Port Flex-10 10GbE Multifunction Server Adapter and one

(1) additional 10/100 server adapter dedicated to iLO 2 management

HP Embedded SATA Controller

Two (2) non-hot plug internal SATA SSD drive bays

HP Integrated Lights-Out 2 (iLO 2) management processor

Step 2: Choose Required Options (one of the following from each list unless otherwise noted)

•	required Opilons (one of the following from each list offiess other	wise floied
HP Processors	For single processor configuration choose: NOTE: If two (2) processors are desired, select one xxxxxx-L21 and one xxxxxx-B21.	
	AMD Opteron™ 2435 2.60GHz Six Core 75 Watts BL495c G6 Factory Integrated Processor Option Kit	539805-L21
	AMD Opteron™ 2427 2.20GHz Six Core 75 Watts BL495c G6 Factory Integrated Processor Option Kit	539808-L21
	AMD Opteron™ 2425HE 2.10GHz Six Core 55 Watts BL495c G6 Factory Integrated Processor Option Kit	539812-L21
HP Memory	HP 2GB (2x1GB) Single Rank PC2-6400 (DDR2-800) Registered Memory Kit	497763-B21
	HP 4GB (2x2GB) Single Rank PC2-6400 (DDR2-800) Registered Memory Kit	497765-B21
	HP 8GB (2x4GB) Dual Rank PC2-6400 (DDR2-800) Registered Memory Kit	497767-B21
	HP 8GB (2x4GB) Dual Rank x4 PC2-6400 (DDR2-800) Registered Low Power Memory Kit	504351-B21
	HP 16GB (2x8GB) Dual Rank PC2-5300 (DDR2-667) Registered Memory Kit	408855-B21
	HP 64GB (8x8GB) Dual Rank PC2-5300 (DDR2-667) Registered Memory Kit	495605-B21
	NOTE: Must be installed in pairs. NOTE: The memory bus will operate at 800 MHz with four (4) or fewer DIMMs per processor, 667 MHz with six (6) DIMMs per processor, and 533 MHz with eight (8) DIMMs per processor.	
	- · · · · · · · · · · · · · · · · · · ·	



Configuration Information - Factory Integrated Models

Step 3: Choose Additional Options for Factory Integration

NOTE: For additional "Core Options and Additional Options" please see the options sections below. For additional options, including server blade enclosures interconnect and mezzanine options and power subsystem options; please see the following QuickSpecs:

HP BladeSystem c-Class Infrastructure QuickSpecs:

HP BladeSystem c3000 Enclosure QuickSpecs:

http://h18000.www1.hp.com/products/quickspecs/12790 na/12790 na.html

HP BladeSystem c7000 Enclosure QuickSpecs:

http://h18000.www1.hp.com/products/quickspecs/12810 na/12810 na.html

and HP BladeSystem c-Class Interconnect and Mezzanine Components:

http://h18004.www1.hp.com/products/blades/components/c-class-interconnects.html

http://h18004.www1.hp.com/products/blades/components/c-class-adapters.html.



Core Options

NOTE: Some options may not be integrated at the factory. To ensure only valid configurations are ordered, HP recommends the use of an HP approved configurator. Contact your local sales representative for additional information.

HP Ethernet Mezzanine
Options

Gigabit Ethernet Mezzanines

HP NC325m PCI Express Quad Port 1Gb Server Adapter for c-Class BladeSystem NOTE: If the NC325m is installed in mezzanine slot 1 of a half-height server, connectivity will be provided on only 2 of the 4 ports.	416585-B21
HP NC326m PCI Express Dual Port 1Gb Server Adapter for c-Class BladeSystem	406771-B21
HP NC360m Dual Port 1GbE BL-c Adapter	445978-B21
HP NC364m Quad Port 1GbE BL-c Adapter	447883-B21

NOTE: If the NC364m is installed in mezzanine slot 1 of a half-height server, connectivity will be provided on only 2 of the 4 ports.

HP NC382m Dual Port 1GbE Multifunction BL-c Adapter 453246-B21
QLogic iSCSI Dual Port Adapter with Virtual Connect for c-Class BladeSystem 488074-B22

NOTE: The Gigabit Ethernet adapters above transmit from the server at 2000 Mbps, full duplex per port. For more information, see the "Network Controller" segment in the Standards Features section.

10 Gigabit Ethernet Mezzanines

NOTE: A 10 Gigabit Ethernet adapter is required for each server blade connecting to a 10Gb interconnect in bays 3-8 (HP BladeSystem c7000 Enclosure) or bays 2-4 (HP BladeSystem c3000 Enclosure).

NOTE: Each 10 Gigabit Ethernet adapter requires a minimum of 2GB of server memory.

NOTE: Each 10 Gigabit Either adapter supports linking at 1000Mbps or 10000Mbps when not connected to a Flex-10 enabled module and will link with all current 1Gb switches at 1Gb.

NOTE: The ROM Based Setup Utility (RBSU) feature allows for the configuring of a FlexFabric Adapter to any of the supported protocols. For example iSCSI to FCoE (Fibre Channel over Ethernet). Note that a HP Virtual Connect profile takes precedence over the setting in this menu. Also, some FlexFabric Adapters may require that network boot be enabled in order to configure the protocol. If the protocol is configured without enabling network boot with certain FlexFabric Adapters, the protocol may not take effect. Once the protocol has taken effect on the first boot after configuring this option, network boot may be disabled if desired.

7	
HP NC522m Dual Port Flex-10 10GbE Multifunction BL-c Adapter	467801-B21
HP NC532m Dual Port Flex-10 10GbE Multifunction BL-c Adapter	467799-B21
HP NC542m Dual Port Flex-10 10GbE Multifunction BL-c Adapter	539857-B21
HP NC550m 10GbE 2-port PCle x8 Flex-10 Ethernet Adapter	581204-B21
HP BLc NC552m Flex-10GbE Dual Port Adapter	610609-B21
HP NC553m 10Gb 2-port FlexFabric Adapter	613431-B21

HP Fibre Channel Mezzanine Options

Fibre Channel Mezzanine Options

Emulex LPe1105 4Gb Fibre Channel Host Bus Adapter for c-Class BladeSystem	403621-B21
QLogic QMH2462 4Gb Fibre Channel Host Bus Adapter for c-Class BladeSystem	403619-B21



Core Options		
HP Processors	HP BL495c G6 AMD Opteron™ 2435 (2.60GHz/6-core/6MB/75W) Processor Kit HP BL495c G6 AMD Opteron™ 2427 (2.20GHz/6-core/6MB/75W) Processor Kit HP BL495c G6 AMD Opteron™ 2425HE (2.10GHz/6-core/6MB/55W) Processor Kit	539805-B21 539808-B21 539812-B21
HP Memory	HP 2GB (2x1GB) Single Rank PC2-6400 (DDR2-800) Registered Memory Kit HP 4GB (2x2GB) Single Rank PC2-6400 (DDR2-800) Registered Memory Kit HP 8GB (2x4GB) Dual Rank PC2-6400 (DDR2-800) Registered Memory Kit HP 8GB (2x4GB) Dual Rank x4 PC2-6400 (DDR2-800) Registered Low Power Memory Kit HP 16GB (2x8GB) Dual Rank PC2-5300 (DDR2-667) Registered Memory Kit HP 64GB (8x8GB) Dual Rank PC2-5300 (DDR2-667) Registered Memory Kit NOTE: Must be installed in pairs. NOTE: The memory bus will operate at 800 MHz with four (4) or fewer DIMMs per processor, 667 MHz with six (6) DIMMs per processor, and 533 MHz with eight (8) DIMMs per processor.	497763-B21 497765-B21 497767-B21 504351-B21 408855-B21 495605-B21
HP Hard Drives	NOTE: Drives have either a one year or three year warranty; refer to the specific drive QuickSpecs for details. HP 32GB 1.5G SATA SFF (2.5-inch) Non-hot Plug Entry 3yr Warranty Solid State Drive HP 64GB 1.5G SATA SFF (2.5-inch) Non-hot Plug Entry 3yr Warranty Solid State Drive NOTE: Please see the QuickSpecs for Technical Specifications and additional information: http://h18000.www1.hp.com/products/quickspecs/13121_na/13121_na.html	461201-B21 461203-B21



Additional Options

NOTE: Some options may not be integrated at the factory. To ensure only valid configurations are ordered, HP recommends the use of an HP approved configurator. Contact your local sales representative for additional information.

HP Insight software

HP Insight Control

HP Insight Control including 1yr 24x7 Technical Support and Updates Electronic T9074BAE

HP Insight Control including 1yr 24x7 Technical Support and Updates Single Server 452148-B22

License

HP Insight Software Media Kit

436222-B21 NOTE: Insight Software DVD media without licenses. Contains Insight Control, Insight

Dynamics and Virtual Connect Enterprise Manager. Uses an integrated installer to perform quick and accurate software installation and updates.

NOTE: Licenses ship without media. The HP Insight Control Media Kit can be ordered separately, or can be downloaded at: http://www.hp.com/go/insightupdates.

NOTE: Electronic licenses can be used to purchase multiple licenses with a single activation key.

NOTE: Customer will receive a license entitlement certificate, which must be redeemed online or via fax in order to obtain the license activation key(s). Includes one year of 24 x 7 HP Software Technical Support & Update Service.

NOTE: For additional license kits, including bundles with HP BladeSystem enclosures, please see the Insight Control QuickSpecs at:

http://h18004.www1.hp.com/products/quickspecs/12631 na/12631 na.html

HP Insight Control for Linux

HP Insight Control for Linux including 1yr 24x7 Support Electronic License TC213AAE HP Insight Control for Linux including 1yr 24x7 Support Single Server License TC209A HP Insight Control for Linux Media Kit TC208A

NOTE: Media pack DVD contains HP Insight Control for Linux, HP Systems Insight Manager, HP Insight Control power management, HP Insight Control virtual machine management, and an integrated installer. Licenses must be acquired separately.

NOTE: Licenses ship without media. The Media Kit for Insight Control for Linux can be ordered separately, or can be downloaded at: http://www.hp.com/go/ic-linux (click on Download button).

NOTE: Electronic licenses can be used to purchase multiple licenses with a single activation key.

NOTE: Customer will receive a license entitlement certificate, which must be redeemed online or via fax in order to obtain the license activation key(s). Includes one year of 24 x 7 HP Software Technical Support Service.

NOTE: For additional License Kits, including electronic licensing options, please see the QuickSpecs at:

http://h18000.www1.hp.com/products/quickspecs/13019 na/13019 na.html

HP Integrated Lights-Out (iLO) Advanced for BladeSystem Remote Management

HP iLO Advanced for BladeSystem including 1yr 24x7 Support Electronic License

HP iLO Advanced for BladeSystem including 1yr 24x7 Support Single Server License

NOTE: Electronic licenses can be used to purchase multiple licenses with a single activation key.

NOTE: Customer will receive a license entitlement certificate, which must be redeemed online or via fax in order to obtain the license activation key(s). Includes one year of 24 x 7 HP Software Technical Support Service.



TA851AAE

512488-B21

Additional Options

NOTE: For additional license kits please see the HP Integrated Lights-Out 2 (iLO 2) QuickSpecs at:

http://h18000.www1.hp.com/products/quickspecs/12362 na/12362 na.html

HP Insight Control server deployment

HP Insight Control Server Deployment including 1yr 24x7 Support Electronic License

T9082AAE

HP Insight Control Server Deployment including 1yr 24x7 Support Single Server

452151-B21

License

NOTE: Licenses ship without media. The Insight Control Media Kit can be ordered separately, or can be downloaded at: http://www.hp.com/go/insightupdates.

NOTE: Electronic licenses can be used to purchase multiple licenses with a single

activation key.

NOTE: Customer will receive a license entitlement certificate, which must be redeemed online or via fax in order to obtain the license activation key(s). Includes one year of 24 x 7 HP Software Technical Support Service.

NOTE: For additional license kits please see the Insight Control QuickSpecs at: http://h18004.www1.hp.com/products/quickspecs/12631 na/12631 na.html

High Performance Clusters

HP Cluster Management Utility Compute Node License

436284-B21

NOTE: This part number can be used to purchase one certificate for multiple licenses with a single activation key. Each license is for one node (server). Customer will receive a printed end user license agreement and license entitlement certificate via physical shipment. The license entitlement certificate must be redeemed online in order to obtain a license key.

 $\operatorname{\mathsf{NOTE}}$: For additional license kits please see the QuickSpecs at:

http://h18004.www1.hp.com/products/quickspecs/12612_na/12612_na.html

HP Cluster Management Utility Media and Management License

433257-B21

NOTE: Order a minimum of one license per cluster to purchase media including software and documentation, which will be delivered to the customer, and also licenses CMU management. No license key is delivered or required.

NOTE: For additional license kits please see the QuickSpecs at:

http://h18004.www1.hp.com/products/quickspecs/12612 na/12612 na.html

HP HPC Linux Value Pack One Processor License

TC293A

NOTE: This part number can be used to purchase one certificate for multiple licenses with a single activation key. Each license is for one socket (a.k.a. processor). Customer will receive a printed end user license agreement and license entitlement certificate via physical shipment. The license entitlement certificate must be redeemed online in order to obtain a license key.

NOTE: For additional license kits please see the QuickSpecs at:

http://h18004.www1.hp.com/products/quickspecs/13485 na/13485 na.html

HP HPC Linux Value Pack Media

TC294A

NOTE: This part number can be used to purchase media including software and documentation, which will be delivered to the customer.

NOTE: For additional license kits please see the QuickSpecs at:

http://h18004.www1.hp.com/products/quickspecs/13485 na/13485 na.html



Additional	Options
, waiii on ai	Cpnons

LID Ctanana Cantallana	C + A D700 C	
HP Storage Controllers	Smart Array P700m Controller	500004 DO1
	HP Smart Array P700m/512 4-ports Ext PCle x8 SAS Controller	508226-B21
	HP Smart Array P700m/256 4-ports Ext PCle x8 SAS Controller	507925-B21
	NOTE: Please see the QuickSpecs for Technical Specifications and additional information:	
	http://h18000.www1.hp.com/products/quickspecs/13175_na/13175_na.html	
	Smart Array P712m Controller	
	HP Smart Array P712m/ZM 2-ports Int PCle x8 SAS Controller	484299-B21
	NOTE: Provides RAID support on internal non-hot plug SSDs. NOTE: Please see the QuickSpecs for Technical Specifications and additional information at: http://h18000.www1.hp.com/products/quickspecs/13296_na/13296_na.html	
	Optional Upgrade	
	HP 650 mAh P-series Low Profile Battery NOTE: The HP 650 mAh P-Series battery option kit is required to enable battery-backed write cache (BBWC) on the P712m.	575031-B21
	HP Smart Array P-Series Low Profile Battery NOTE: The Smart Array P-Series battery option kit is required to enable battery- backed write cache (BBWC) on the P700m.	452348-B21
HP I/O Expansion	HP StorageWorks 80GB IO Accelerator for BladeSystem c-Class	AJ876A
Options	HP StorageWorks 160GB IO Accelerator for BladeSystem c-Class	AJ877A
	HP StorageWorks 320GB IO Accelerator for BladeSystem c-Class	AJ878A
	NOTE: Please see the QuickSpecs for Technical Specifications and additional	
	information: http://h18000.www1.hp.com/products/quickspecs/13220_na/13220_na.html	
HP InfiniBand Mezzanine Options	HP 4X DDR IB Dual Port Mezzanine HCA for HP BladeSystem c-Class	448262-B21
HP Ultrium Tape Blades	HP StorageWorks SB1760c Tape Blade NOTE: LTO-4 Ultrium technology	AQ697A
	HP StorageWorks SB920c Tape Blade NOTE: LTO-3 Ultrium technology	AJ401A
	HP StorageWorks Ultrium 448c Tape Blade NOTE: LTO-2 Ultrium tape technology	440947-B21
	NOTE: Please see the QuickSpecs for Technical Specifications and additional information at:	
	http://h18000.www1.hp.com/products/quickspecs/12729_na/12729_na.html NOTE: Please visit the BladeSystem c-Class enclosure QuickSpecs for a complete list	
	of recommended data protection solutions for BladeSystem c-Class enclosures: http://h18004.www1.hp.com/products/blades/components/enclosures/c-class/index.html.	



Additional Options

HP StorageWorks Storage HP StorageWorks LTO-5 SB3000c Tape Blade
Blades

NOTE: Plages and the Quiet/Space for Taphpier

NOTE: Pleas

BS580A

NOTE: Please see the QuickSpecs for Technical Specifications and additional information at:

http://h18000.www1.hp.com/products/quickspecs/12729 na/12729 na.html

HP StorageWorks SB40c Storage Blade with HP LeftHand VSA bundle

NOTE: Please see the QuickSpecs for Technical Specifications and additional

information at:

http://h18000.www1.hp.com/products/quickspecs/12587 na/12587 na.html

HP Expansion Blade

HP PCI Expansion Blade

448018-B21

NOTE: Ships with one pre-installed PCI-X connect board. Also includes one PCIe

connect board which requires installation.

NOTE: Please see the QuickSpecs for Technical Specifications and additional

information at:

http://h18000.www1.hp.com/products/quickspecs/12753 na/12753 na.html

HP USB and SD Options

HP USB 2-Button Optical Scroll Mouse (Carbonite/Silver)

DC172B

HP USB 04 Standard Keyboard

DT528A#ABA

HP 2GB USB Flash Media Drive Key Kit

608447-B21

NOTE: HP qualified blank USB key for use with HP ProLiant servers that support the VMware virtualization environment and other HP value-add software like SmartStart. HP recommends this industry standard USB flash device for use with VMware ESXi. USB device must be installed in the internal slot of the ProLiant server for use with VMware ESXi. Refer to HP VMware Getting Started Guide for installation instructions.

HP Care Pack Services

NOTE: The HP Care Pack service part numbers below for ProLiant BL c-Class server blades, cover the server blade and all HP branded hardware options qualified for the server, purchased at the same time or afterwards, internal to the server.

Hardware Services On-site Service

4-Hour On-site Service, 5-Day x 13-Hour Coverage, 3 Years, Electronic
4-Hour On-site Service, 7-Day x 24-Hour Coverage, 3 Years, Electronic
6-Hour Call to Repair, On-site Service, 7-Day x 24-Hour Coverage, 3 Years,
UK067E

Electronic



Memory

NOTE: Memory configurations listed do not apply to "Factory Integrated Models".

DIMM installation guidelines:

- 1. All DIMMs must be PC2-5300 Registered DDR2 DIMMs (667 MHz) or PC2-6400 Registered DDR2 DIMMs (800 MHz).
- 2. Both DIMM slots in a memory bank must be populated.
- 3. Both DIMMs in a memory bank must be identical.
- 4. Processor 1 memory bank A must always be populated.
- 5. DIMM banks are active only when the corresponding processor socket is populated.
- 6. If installing only one bank on a processor, populate the bank physically farthest from the processor.
- 7. If mixing DIMM sizes on the same processor, the largest capacity DIMMs must be populated in the bank physically farthest from the processor. The smallest capacity DIMMs must be populated in the bank physically nearest the processor.
- 8. For optimal performance in most applications, populate the first memory bank for every populated processor socket.
- 9. The memory bus will operate at 800 MHz with four (4) or fewer DIMMs per processor, 667 MHz with six (6) DIMMs per processor, and 533 MHz with eight (8) DIMMs per processor.

HP ProLiant BL495c G6 Server Blade

Standard Memory

4096 MB (2 x 2048 MB) of PC2-5300 or PC2-6400, Registered DDR2 ECC DIMMs.

Standard Memory Plus Optional Memory

Up to 118784 MB of PC2-5300 or 61440 MB of PC2-6400, Registered DDR2 ECC DIMMs. Memory is available with the installation of optional PC2-5300 or PC2-6400, Registered DDR2 DIMM memory expansion kits.

Standard Memory Replaced with Optional Memory

Up to 131072 MB of PC2-5300 or 65536 MB of PC2-6400, Registered DDR2 ECC DIMMs. Memory is available with the removal of standard memory and the installation of optional PC2-5300 or PC2-6400, Registered DDR2 DIMM memory expansion kits.

or sidiladia	memory and in	C IIISIGIIGIIOII	<u> </u>	Processor C			ICE DIIVIIVI IIIC	mory expansi	OTT KIIS.
Memory Slot									
		1A							
Standard	4096 MB	2048 MB	2048 MB	Empty	Empty	Empty	Empty	Empty	Empty
Optional	53248 MB	8192 MB	8192 MB	8192 MB	8192 MB	8192 MB	8192 MB	2048 MB	2048 MB
Maximum	65536 MB	8192 MB	8192 MB	8192 MB	8192 MB	8192 MB	8192 MB	8192 MB	8192 MB
			2 Processor (Configuration	n, Total Mem	ory = 60GB			
Me	mory				SI	ot			
		1A 2A 3B 4B 5C 6C				7D	8D		
		4096 MB	4096 MB	4096 MB	4096 MB	4096 MB	4096 MB	2048 MB	2048 MB
		9E	10E	11F	12F	13G	14G	15H	16H
		4096 MB	4096 MB	4096 MB	4096 MB	4096 MB	4096 MB	4096 MB	4096 MB
			2 Processor (Configuration	n, Total Mem	ory = 64GB			
Me	mory				SI	ot			
	1A 2A 3B 4B 5C		5C	6C	7D	8D			
		4096 MB	4096 MB	4096 MB	4096 MB	4096 MB	4096 MB	4096 MB	4096 MB
		9E	10E	11F	12F	13G	14G	15H	16H
		4096 MB	4096 MB	4096 MB	4096 MB	4096 MB	4096 MB	4096 MB	4096 MB
2 Processor Configuration, Total Memory = 116GB									

Memory

Memory	Slot							
	1A	2A	3B	4B	5C	6C	7D	8D
	8192 MB	8192 MB	8192 MB	8192 MB	8192 MB	8192 MB	2048MB	2048MB
	9E	10E	11F	12F	13G	14G	15H	16H
	8192 MB	8192 MB	8192 MB	8192 MB	8192 MB	8192 MB	8192 MB	8192 MB
	2	2 Processor C	2 Processor Configuration, Total Memory = 128GB					
	Slot							
Memory					•			
Memory	1A	2A	3B		•	6C	7D	8D
Memory	1A 8192MB	2A 8192MB	3B 8192MB	SI	ot		7D 8192MB	8D 8192MB
Memory				SI 4B	ot 5C	6C	<u> </u>	

Following are memory options available from HP:

HP Memory	HP 2GB (2x1GB) Single Rank PC2-6400 (DDR2-800) Registered Memory Kit	497763-B21
-----------	--	------------

HP 4GB (2x2GB) Single Rank PC2-6400 (DDR2-800) Registered Memory Kit 497765-B21 HP 8GB (2x4GB) Dual Rank PC2-6400 (DDR2-800) Registered Memory Kit 497767-B21 HP 8GB (2x4GB) Dual Rank x4 PC2-6400 (DDR2-800) Registered Low Power 504351-B21

Memory Kit

HP 16GB (2x8GB) Dual Rank PC2-5300 (DDR2-667) Registered Memory Kit

408855-B21

HP 64GB (8x8GB) Dual Rank PC2-5300 (DDR2-667) Registered Memory Kit 495605-B21

NOTE: Must be installed in pairs.


NOTE: DIMMs must be installed in decreasing capacity with the largest DIMMs installed in the banks furthest away from each processor.

NOTE: The memory bus will operate at 800 MHz with four (4) or fewer DIMMs per processor, 667 MHz with six (6) DIMMs per processor, and 533 MHz with eight (8)

DIMMs per processor.



Storage

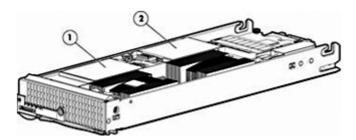

1-2 2 x SATA Solid State Drives (SSD)

SATA Non-Hot Plug Solid State Drives

NOTE: Hard Drives have either a one year or three year warranty; refer to the specific hard drive QuickSpecs for details.

	Quantity Supported	Position Supported	Controller
32GB 1.5G SATA SSD	2	1-2	HP Integrated SATA Controller HP Smart Array P712m Controller
64GB 1.5G SATA SSD	2	1-2	HP Integrated SATA Controller HP Smart Array P712m Controller

Technical Specifications

System Unit **Dimensions** 7.154 x 2.19 x 20.058 in (18.17 x 5.56 x 50.95 cm)

 $(H \times W \times D)$

14.20 lb (6.44 kg) Weight Maximum

(approximate) (all hard drives and

processors installed)

Minimum 10.75 lb (4.87 kg)

(one hard drive and processor installed)

Power Specifications For power specifications including Input Requirements, BTU Rating, and

Power Supply Output, please see the HP BladeSystem c-Class Enclosures

QuickSpecs located at URL:

HP BladeSystem c3000 Enclosure QuickSpecs:

http://h18000.www1.hp.com/products/quickspecs/12790 na/

12790 na.html

HP BladeSystem c7000 Enclosure QuickSpecs:

http://h18000.www1.hp.com/products/quickspecs/12810 na/

12810 na.html

To review typical system power ratings use the HP BladeSystem Power Sizer

which is available via the online tool located at URL: http://www.hp.com/go/bladesystem/powercalculator

10° to 35°C (50° to 95°F) at sea level with an **System Inlet Temperature** Operating

> altitude derating of 1.0°C per every 305 m $(1.8^{\circ}F)$ per every 1000 ft) above sea level to a maximum of 3050 m (10,000 ft), no direct sustained sunlight. Maximum rate of change is 10°C/hr (18°F/hr). The upper limit may be limited by the type and number of options

installed.

System performance may be reduced if operating

with a fan fault or above 30°C (86°F).

Non-operating -30° to 60°C (-22° to 140°F). Maximum rate of

change is 20°C/hr (36°F/hr).

Relative Humidity

(non-condensing)

Operating 10 to 90% relative humidity (Rh), 28°C (82.4°F)

maximum wet bulb temperature, non-

condensing.

5 to 95% relative humidity (Rh), 38.7°C Non-operating

(101.7°F) maximum wet bulb temperature, non-

condensing.

Altitude Operating 3050 m (10,000 ft). This value may be limited by

the type and number of options installed.

Non-operating Maximum allowable altitude change rate is 457

m/min (1500 ft/min).

Acoustic Noise For acoustic noise specifications, please see the HP BladeSystem c-Class

Enclosures QuickSpecs located at URL:

HP BladeSystem c3000 Enclosure QuickSpecs:

http://h18000.www1.hp.com/products/quickspecs/12790 na/

12790 na.html



Technical Specifications

HP BladeSystem c7000 Enclosure QuickSpecs:

http://h18000.www1.hp.com/products/quickspecs/12810 na/

12810 na.html

Embedded NC532i Dual Type Port Flex-10 10GbE Multifunction Server Adapter

Integrated dual-port KR 10GbE

Network Processor Data Transfer Method Broadcom 57711 x8 PCI Express 1.0

Network Transfer Rate

Two ports, each at 20 Gbps full duplex; 40 Gbps aggregate full duplex

theoretical bandwidth

NOTE: Each port is autosensing 1 Gb / 10 Gb, and can interoperate with 1

Gb HP BladeSystem c-Class interconnect components.

NOTE: Each port on the NC532i adapter transmits from the server at only

20 Gbps (theoretical) full duplex.

IEEE Compliance

802.1p QoS, 802.1Q VLAN tagging, 802.3ad link aggregation, 802.3ap

10GBase-KR, and 802.3x flow control

Standard Features

ProLiant Teaming including Network Fault Tolerance, Transmit Load Balancing, and Switch-Assisted Load Balancing

- 4K Jumbo frames
- Microsoft Windows Receive Side Scaling (RSS)
- Optional accelerated iSCSI

HP Integrated Lights-Out Architecture 2 (iLO 2) integrated on system board

32-bit PCI-based health and remote management ASIC

Processor Upgradeability Video Support

32-bit RISC processor core running at 66MHz Option firmware upgradeable via Flash ROM

Utilizes the host server's embedded video chip - supports VGA/SVGA, 640 x

480 (256 to 16.7M colors), 800 x 600 (256 to 16.7M colors), 1024 x 768 (256 to 65K colors), 1280 x 1024 (256 colors)

Interfaces Memory

One Ethernet network connection (10/100 Mb/s)

4-MB Flash ROM

16-MB SDRAM

Operating System Support

Microsoft Windows Server 2008 Standard Edition (32bit and 64bit)

Microsoft Windows Server 2008 Enterprise Edition (32bit and 64bit) Microsoft Windows Server 2003 and Windows Server 2003 R2, and Windows Server 2003 for Extended Systems Standard Edition, Enterprise

Edition

Red Hat Enterprise Linux 5.4 (32bit and 64bit) SUSE LINUX Enterprise Server 11 (32bit and 64bit) SUSE LINUX Enterprise Server 10 (32bit and 64bit)

VMware ESX 4.0 VMware ESX 3.5.0

Microsoft Windows XP Professional Edition

Microsoft Windows Vista Business and Ultimate Editions

Red Hat Enterprise Linux Desktop 5.00 SUSE Linux Enterprise Desktop 11



Technical Specifications

SUSE Linux Enterprise Desktop 10

Client System Support Microsoft Windows XP Professional Edition

Microsoft Windows Vista Business and Ultimate Editions

Red Hat Enterprise Linux Desktop 5.00 SUSE Linux Enterprise Desktop 11 SUSE Linux Enterprise Desktop 10

Client Browser Support Microsoft Internet Explorer 7

Microsoft Internet Explorer 6

Firefox 3.5 (on supported Windows and Linux systems) Firefox 3.0 (on supported Windows and Linux systems)

Command Line Support Telnet, Secure Shell and serial port access

Secure Socket Layer

Secure Shell version 2 (Password and certificate)

Security Advanced Encryption Standard (AES) and Triple Data Encryption Standard

(3DES) on browser, CLP and XML scripting interface

RC4 encryption of video

Environment-friendly Products and Approach

End-of-life Management and Recycling

Hewlett-Packard offers end-of-life HP product return, trade-in, and recycling programs in many geographic areas. For trade-in information, please go to: http://www.hp.com/go/green. To recycle your product, please go to: http://www.hp.com/go/green or contact your nearest HP sales office. Products returned to HP will be recycled, recovered or disposed of in a

responsible manner.

The EU WEEE directive (2002/95/EC) requires manufacturers to provide treatment information for each product type for use by treatment facilities. This information (product disassembly instructions) is posted on the Hewlett Packard web site at: http://www.hp.com/go/green. These instructions may be used by recyclers and other WEEE treatment facilities as well as HP OEM

customers who integrate and re-sell HP equipment.

© Copyright 2011 Hewlett-Packard Development Company, L.P.

The information contained herein is subject to change without notice.

Microsoft and Windows NT are US registered trademarks of Microsoft Corporation. AMD is a US registered trademark of AMD Corporation.

The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.

For hard drives, 1GB = 1 billion bytes. Actual formatted capacity is less.

